NWR NORTH WEST RUBBER INNOVATIVE RUBBER PRODUCTS





FOR ICE ARENAS




NWR VULCANIZATION EXPERTISE


North West Rubber specializes in vulcanization, the process of cross-linking polymers together under high heat and pressure. The result of this process is the ideal surface for today's ice arena – a more durable product that is highly resistant to moisture absorption and wear and tear. NWR is the only manufacturer to offer vulcanized rubber flooring solutions in both recycled & virgin rubber technology.


	VULCANIZED PRODUCTS	POLYURETHANE BOUND PRODUCTS
Durability	Greater tensile strength, elasticity.	With continuous use, product will deteriorate.
Non-porous	Does not absorb any liquids, single piece of rubber.	Liquids absorb into pores between rubber particles.
Finish / Sealers	Not required.	Required to close pores from absorbing liquids.
Maintenance	Smooth top surface makes cleaning easy.	Porous top surface makes cleaning more difficult.
Cleanliness	Does not harbor bacteria.	Porous surface allows bacteria to penetrate & spread.

ICE RINK APPLICATIONS

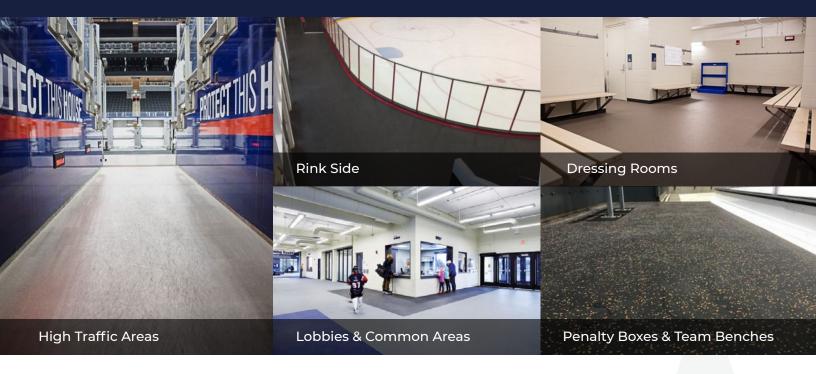

VULCANIZED RUBBER FEATURES & BENEFITS













ENDLESS CUSTOMIZATION POSSIBILITIES

North West Rubber is #1 in precision colour customization and custom logo cutting. With a minimum order quantity of only 500 square feet, we guarantee +/- one Pantone® shade to match your desired colour. NWR uses ultrasonic cutting technology to create precise, inlaid flooring logos for a premium personalized look.







VULCANIZED RECYCLED RUBBER FLOORING



















BLACK

GREY

RED

ORANGE

	TILES	MATS
Construction	100% Vulcanized Recycled Rubber	100% Vulcanized Recycled Rubber
Thickness	8mm, 10mm, 12mm	8mm, 10mm, 12mm
Size	0.6 m x 0.6 m (24" x 24")	1.22 m x 1.83 m (4' x 6')
Area	4 sq.ft.	24 sq.ft.
Finish	Smooth Top, Textured Underside	Smooth Top, Textured Underside

VULCANIZED VIRGIN RUBBER FLOORING SYSTEMS

















SPORTFLOOR ReAction





CHOCOLATE







COBALT CHARCOAL

BRICK

SHAMROCK

	TILES	ROLLS
Construction	Dual-Layer Vulcanized Rubber	Dual-Layer Vulcanized Rubber
Thickness	3.5mm, 6mm, 8mm, 10mm	3.5mm, 6mm, 8mm, 10mm
Size	lm x lm (39.4" x 39.4")	8mm, 10mm: 1.22m x 9.14m (4' x 30') 3.5mm, 6mm: 1.22m x 15.24m (4' x 50')
Area	10.75 sq.ft.	8mm, 10mm: 120 sq.ft. 3.5mm, 6mm: 200 sq.ft.
Finish	Matte	Matte

T 604.859.2002 | F 604.859.2009 | TOLL FREE 1.800.663.8724 northwestrubber.com/sportfloor







