

**PRODUCT DESCRIPTION**

Manufactured from recycled rubber, SportFloor® Stamina is 100% vulcanized, durable and long-lasting, featuring a non-porous surface that is engineered to repel sweat and other liquids, minimizing bacteria build-up, reducing odour and facilitating easier maintenance. The result is a cleaner, longer lasting floor capable of safely handling all types of surface challenges associated with high traffic athletic and fitness facilities.

**TECHNICAL SPECIFICATIONS**

Hardness Shore A	ASTM D2240	75 +/- 5
Wear Layer Thickness	ASTM F410	>.050 (Passes)
Static Load Resistance	ASTM F970	0.002 (Passes)
Resistance to Chemicals	ASTM F925	Good
Resistance to Heat	ASTM F1514	4.29 (Passes)
Abrasion Resistance	ASTM D3389	0.16 gr. (Passes)
Dimensional Stability	ASTM F2199	0.12 (Passes)
Critical Radiant Flux	ASTM E648-03	Class II
Co-efficient of Friction	ASTM C1028	>.80 dry >.64 wet
Moisture Absorption	ASTM D570	0.27%
Thickness	ASTM F386	Avg. 0.002 Passes
Size	ASTM F2055	Avg. 0.004 Passes
Squareness	ASTM F2055	Avg. 0.003 Passes
Quality of Cut	ASTM F511	Avg. 0.003 Passes
Qualifies for LEED Points	-	Yes
Anti-microbial / Anti-fungal properties	-	Yes


**SIZE & COLORS**

Construction:  
100% recycled rubber.




STRAIGHT-EDGED MATS			
Thickness	Dimensions	Weight	Area
5/16" (8mm)	4' x 6' (1.22m x 1.83m)	48 lbs./mat (21.8kg)	24 sq.ft. (7.32 sq.m.)
3/8" (10mm)		60 lbs./mat (27.2kg)	
1/2" (12mm)		70 lbs./mat (31.8kg)	
3/4" (17mm)		100 lbs./mat (45.4kg)	
INTERLOCKING MATS AND TILES			
Thickness	Dimensions	Weight	Area
5/16" (8mm)	1.85' x 1.85' (0.56m x 0.56m)	7 lbs./tile (3.2kg)	3.42 sq.ft. (1.04 sq.m.)
	3' 8.3" x 5' 6.5" (1.13m x 1.69m)	46 lbs./mat (20.7kg)	20.46 sq.ft. (6.24 sq.m.)
3/8" (10mm)	1.85' x 1.85' (0.56m x 0.56m)	9 lbs./tile (4.1kg)	3.42 sq.ft. (1.04 sq.m.)
	3.69' x 5.54' (1.13m x 1.69m)	56 lbs./mat (25.4kg)	20.46 sq.ft. (6.24 sq.m.)
1/2" (12mm)	3.69' x 5.54' (1.13m x 1.69m)	66 lbs./mat (30kg)	20.46 sq.ft. (6.24 sq.m.)
	3.69' x 5.54' (1.13m x 1.69m)	86 lbs./mat (39kg)	20.46 sq.ft. (6.24 sq.m.)

**Total estimated lifetime cost of 1,000 square feet of flooring installed & maintained over 15 years.**

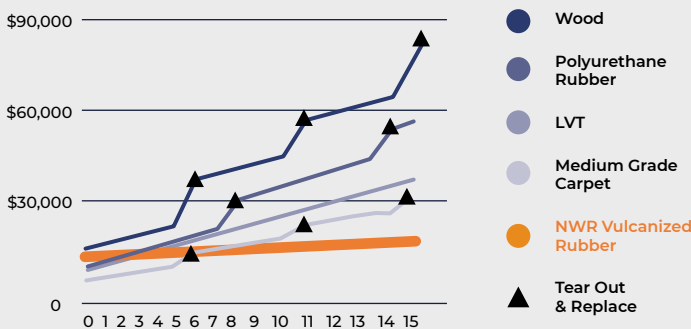

**STANDARD COLORS**

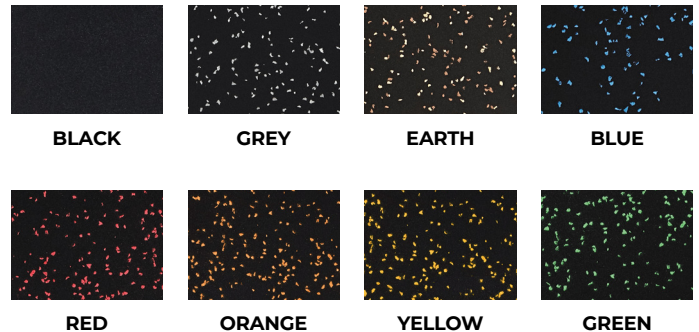

- Vulcanized Durability**
- 99.5% Anti-Microbial**
- 100% Recycled Rubber**
- Unmatched Tensile Strength**
- Cut & Dent Resistant**